



**(43) International Publication Date**  
**28 April 2005 (28.04.2005)**

**PCT**

**(10) International Publication Number**  
**WO 2005/038189 A1**

- (51) **International Patent Classification<sup>7</sup>:** E21B 7/18, (72) **Inventor; and**  
10/60, B24C 1/04, 5/04, E21B 41/00 (75) **Inventor/Applicant (for US only):** BLANGÉ, Jan-Jette  
[NL/NL]; Kesslerpark 1, NL-2288 GS Rijswijk (NL).

(21) **International Application Number:** PCT/EP2004/052593 (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) **International Filing Date:** 20 October 2004 (20.10.2004) (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(25) **Filing Language:** English

(26) **Publication Language:** English


(30) **Priority Data:**  
03103883.9 21 October 2003 (21.10.2003) EP  
PCT/EP04/051407 8 July 2004 (08.07.2004) EP

(71) **Applicant (for all designated States except CA, US):** SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

(71) **Applicant (for CA only):** SHELL CANADA LIMITED [CA/CA]; 400 - 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).

*[Continued on next page]*

- (54) Title:** NOZZLE UNIT AND METHOD FOR EXCAVATING A HOLE IN AN OBJECT

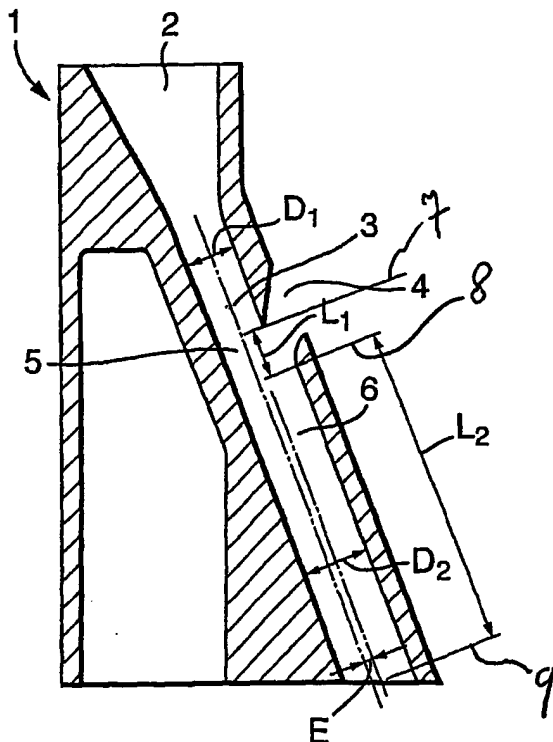

**(57) Abstract:** Nozzle unit (1) for generating an abrasive jet, which nozzle unit (1) comprises: a first nozzle (3) connected to a pressurized carrier fluid supply (2); a mixing chamber (5) in which the first nozzle (3) discharges; a second nozzle (6) connected to the mixing chamber (5); and an abrasive particle inlet (4) discharging in the mixing chamber (5); wherein the proportion of the cross sectional area of the first nozzle opening ( $A_1$ ) and the cross sectional area of the second nozzle opening ( $A_2$ ) is in a range of 0.50-1.0.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

- 1 -

## NOZZLE UNIT AND METHOD FOR EXCAVATING A HOLE IN AN OBJECT

The invention relates to a nozzle unit for generating an abrasive jet, which nozzle unit comprises:

- a first nozzle connected to a pressurized carrier fluid supply;
- 5    - a mixing chamber in which the first nozzle discharges;
- a second nozzle connected to the mixing chamber; and
- an abrasive particle inlet to the mixing chamber.

Such a nozzle unit can be used for excavating a hole  
10   into an object.

A nozzle unit in accordance with the above is generally known in the field of abrasive water jet machining. Devices for abrasive water jet machining typically operate at an ambient pressure substantially  
15   equal to atmospheric pressure. The water jet, which is virtually free of any solids, is jetted into a mixing chamber at a pressure of well above 1 kbar. A dry abrasive material is kept at atmospheric pressure and due to the jet pump mechanism in the mixing chamber, the  
20   abrasive particles are sucked into the mixing chamber through the abrasive particle inlet.

In the field of drilling holes into geological earth formations, an abrasive water jet system including a nozzle unit with a jet pump mechanism can be used for  
25   drilling a hole, see for example WO 02/34653. However, the conditions in this field are substantially different from the field of atmospheric abrasive jet machining since the ambient pressure is well above atmospheric

pressure and increases with about 1 bar per 10 meters depth.

5 In the case of the atmospheric abrasive water jet machining systems, air is sucked into the mixing chamber together with the abrasive particles. This air flow into the nozzle unit may generate cavitation that can limit the transfer of kinetic energy from the water jet to the abrasive material. Consequently, the efficiency of the nozzle unit, which is based on this kinetic energy transfer, is limited by the cavitation.

10 Another important source of cavitation may stem from turbulence in and around the jet stream. Pressure fluctuations in the turbulence locally include pressures below the vapour pressure of the carrier fluid, which possibly causes vaporization, the creation of gas bubbles, and cavitation.

20 There is a desire for a nozzle unit that is able to impart at an as high as possible efficiency kinetic energy to abrasive particles at an as low as possible consumption rate of abrasive particles so that the nozzle unit can be used within a limited space available in a typical bore hole in a geological earth formation.

25 International application WO-A 91/12930 mentions an efficiency reduction of conventional nozzle units when applied in increased ambient pressure conditions, and reports the construction of a nozzle unit that allows for a relatively easy modification of the mixing chamber length. This measure corrects the nozzle design for the increase in jet divergence caused by the gradual decrease of a cavitation shield around the jet with ambient pressure.

30 US patent 4,555,872 describes a nozzle apparatus in accordance with the preamble for generating an abrasive

fluid jet stream having material cutting capabilities for objects at atmospheric pressure. A first nozzle is provided with an orifice plate of sapphire, having a cone-shaped orifice of which the smallest flow opening  
5 have a diameter of approximately 0.5 mm (0.020 inch). Herewith an extremely high pressure-drop is achievable at a low flow rate. A second nozzle downstream of the first nozzle is provided in the form of a tapered flow shaping cone, of which the smallest flow opening has a diameter  
10 of approximately 1.5 mm (0.060 inch).

It has been found that none of the prior art nozzle units described above is capable of delivering a satisfactory abrasive jet stream in a high pressure surrounding such as is typically encountered when  
15 drilling holes into geological earth formations, taking into consideration special boundary conditions that apply.

In accordance with the invention there is provided a nozzle unit for generating an abrasive jet, which nozzle  
20 unit comprises a first nozzle connected to a pressurized carrier fluid supply, a mixing chamber in which the first nozzle discharges a second nozzle connected to the mixing chamber, and an abrasive particle inlet discharging in the mixing chamber, wherein the proportion of the cross  
25 sectional area of the first nozzle opening and the cross sectional area of the second nozzle opening is greater than or equal to 0.50 and lower than 1.

For the purpose of this specification, the cross sectional area  $A$  of a nozzle opening is defined as the  
30 cross sectional area of a flow opening in a section of the nozzle with the highest restriction, because the pressure drop at a certain flow rate is largely determined by the cross sectional area of the smallest

flow opening in a nozzle. The "diameter"  $D$  of a nozzle opening is defined as  $2\sqrt{A/\pi}$ , which in the case of a circular flow restriction corresponds to the width of the flow opening in the smallest waist.

5           It has been found that the larger the cross sectional area of the second nozzle flow opening is compared to that of the first nozzle, the more abrasive particles need to be entrained in the flow of the carrier fluid in order to achieve a substantial amount of kinetic energy transferred from the jet stream created by the first  
10       nozzle (the "driving jet") to the entrained abrasive particles. This transfer of kinetic energy is considered to be the efficiency of the nozzle unit.

          If the proportion between the first and second nozzle  
15       cross sectional areas is less than 0.5, a relatively large amount of abrasive particles is required to fill the space in the second nozzle causing problems to supply the abrasive particles, in particular in a down-hole application where there is not much operational volume  
20       available. It would be possible to allow a higher ratio of entrained fluid verses abrasive particles to enter into the mixing chamber via the abrasive particle inlet. However, this leads to an undesired lowering of efficiency, because the entrained fluid consumes kinetic  
25       energy out of the driving jet but is non-effective for hole excavating compared to a similar amount of kinetic energy vested in the abrasive particles. Thus, the lower limit of allowable proportion between first and second nozzle cross sectional areas is 0.5.

30           On the other hand, the cross sectional area of the second nozzle should always be larger than the area of the first nozzle, i.e. a proportion of less than 1, in

order to accommodate at least some entrained abrasives in addition to the high pressure jet stream.

5 Unlike the design of the nozzle unit described in WO-A 91/12930, the nozzle unit according to the invention is optimized to accommodate the supply and relative flow rates of the carrier fluid, the abrasive particles, and entrained fluid.

10 It is believed that for this reason the nozzle unit according to the invention has been satisfactory operable under high ambient pressure, in particular at an ambient pressure of higher than 50 bars, or of even higher than 300 bars. The nozzle unit is therefore particularly suitable for application in excavating subterranean earth formations at depths exceeding a few hundred meters up to  
15 several kilometres.

It is remarked that the said proportion of first and second nozzle cross sectional areas in the nozzle apparatus of US patent 4,555,872 is only 0.11.

20 Preferably the said proportion of cross sectional areas is lower than 0.9, so as to ensure that a sufficient number of abrasive particles can be entrained in the flow of carrier fluid.

25 In a preferred embodiment of the invention the length in the flow direction of the mixing chamber is such, that taking into account the divergence of the jet from the first nozzle, the diameter of the jet leaving the mixing chamber is smaller than the diameter of the second nozzle opening.

30 It has been found that this preference can be more easily met when the proportion of cross sectional areas is lower than 0.60. A submerged jet typically has a divergence of 8°-9° (see "The theory of turbulent jets" by G.N. Abramovich, MIT press, Massachussetts (1963)). The

length is defined as the distance between the exit opening of the first nozzle and the entry opening of the second nozzle. The entry opening is defined as the first point, where the smallest cross-section is present.

5           In an embodiment of the invention the length of the mixing chamber is in the range of 0.8-2.0 times the diameter of the first nozzle opening. This provides for an efficient mixing of the abrasive particles with the jet, while keeping the length of the mixing chamber  
10           limited. This has the advantage, that the jet can be placed under an angle, which is necessary when drilling holes. When using the nozzle unit according to the invention, the nozzle is rotated, such that a hole with a substantial circular cross section is generated.

15           In view of this use, it is furthermore preferred that the length of the second nozzle is in a range of 4-10 times the second nozzle diameter.

          In an embodiment of the invention, the second nozzle is eccentrically arranged relative to the first nozzle  
20           with respect to the flow direction. Preferably the eccentric displacement of the second nozzle has a component in the direction of the abrasive particle inlet. Herewith it is constructionally easier to keep the smallest dimensions of the abrasives supply opening  
25           substantially equal to the diameter of the first nozzle, while maximizing the proportion of the cross sectional area of the first nozzle to the second nozzle.

          The eccentric displacement is preferably up to the situation that part of the first nozzle wall is in line  
30           with part of the second nozzle wall. In the case of both a cylindrical first nozzle and a cylindrical second nozzle the eccentricity  $E$  is then equal to half the difference between the two nozzle diameters.



It is furthermore preferred that at least part of an inside wall of the first nozzle is aligned with at least part of an inside wall of the second nozzle.

5 In an embodiment of the invention, the nozzle unit comprises a supply channel connected to the abrasive supply inlet, wherein the supply channel surrounds the mixing chamber by an angle of less than  $180^\circ$ . In this way efficient use can be made of the eccentric secondary nozzle configuration when provided. At the same time, the  
10 supply inlet should be sufficiently wide to be able to supply abrasive particles without substantial risk of blockage.

The included angle between the flow direction in the supply channel and an axis along the flow direction in  
15 the primary nozzle is preferably as small as possible. This way the supplied abrasive particles get an as large as possible velocity component parallel to the jet stream generated by the primary nozzle. In an embodiment of the invention, the angle is smaller than  $60^\circ$ , preferably  
20 smaller than  $30^\circ$ . Due to mechanical constraints, the angle is typically larger than  $10^\circ$ .

The invention further relates to a combination of a nozzle unit according to the invention and a separation device for separating magnetical or magnetizable abrasive  
25 particles from a fluid, which separation device comprises a magnet body for attracting the abrasive particles out of a fluid flowing along the separation device, and a support surface at least partially enveloping the magnet body, and means for transporting attracted abrasive  
30 particles along the support surface to the abrasive particle inlet of the nozzle unit.

The invention also relates to a method of excavating a hole into an object, comprising the steps of:

- arranging an abrasive jet excavating tool comprising a nozzle unit according to the invention into the hole;
- generating an abrasive jet by supplying a pressurized carrier fluid to the first nozzle and discharging
- 5 abrasive particles into the mixing chamber; and
- directing the abrasive jet into the object.

For the purpose of this specification, an object is understood to include primarily earth formations, including subterranean earth formations, and also cement, casing steel, or packer material in a well for the

10 exploration or production of hydrocarbons. Such types of objects can in normal operation be located several kilometres depth under the earth surface, such that the ambient pressure can exceed 300 bars.

15 These and other features of the invention will be elucidated below by way of example and with reference to the accompanying drawing, wherein

Figure 1 schematically shows a perspective view of an embodiment of the nozzle unit according to the invention;

20 Figure 2 schematically shows a cross sectional view of the nozzle unit according to Figure 1 along line X-X;

Figure 3 shows a calculated graph setting out nozzle unit efficiency against ratio of nozzle cross sections; and

25 Figure 4 schematically shows a schematic cross sectional view of an excavating tool comprising the nozzle unit according to the invention.

In Figure 1 a perspective view of a nozzle unit 1 according to the invention is shown. The nozzle unit 1 is

30 advantageously manufactured out of tungsten carbide based materials, for instance similar materials as used for mixing tubes in the field of abrasive water jet machining.

The nozzle unit 1 has an inlet 2, for supply of a pressurized carrier fluid to the nozzle unit 1. In addition, the nozzle unit has an abrasive particle inlet 4. Abrasive particles can reach the abrasive particle inlet via a supply channel that is connected to the abrasive supply inlet 4. As can be seen in Figure 1, the supply channel surrounds the abrasive supply inlet 4 by an angle  $\alpha$ . The angle  $\alpha$  is preferably more than  $90^\circ$  and less than  $180^\circ$ , and in the preferred embodiment as shown in Figure 1 it is  $140^\circ$ .

Referring now to Figure 2, the inlet 2 leads to a first nozzle 3. In the embodiment, the first nozzle 3 has a circular cross section, having a smallest waist diameter  $D_1$  corresponding to a flow opening having a first cross sectional flow area of  $A_1$  in the narrowest flow restriction. The nozzle 3 may have a non-circular cross section instead, such as an oval cross section.

The first nozzle 3 discharges into a mixing chamber 5, which mixing chamber has a length along its flow direction of  $L_1$  measured between the exit plane 7 of the first nozzle 3 and the exit plane 8 of the mixing chamber 5 similar to the definitions given on page 260 of "Applied fluid dynamics handbook" by R. D. Blevins, 1992 edition Krieger Publishing Company, Florida. The abrasive particle inlet 4 also discharges into the mixing chamber 5.

The exit plane 7 of the first nozzle 3 is defined as the plane perpendicular to the flow direction located just at the point where as seen in flow direction through the nozzle the flow opening widens. Likewise, the exit plane 8 of the mixing chamber is defined as the plane perpendicular to the flow direction located just at the point where as seen in flow direction through the mixing

chamber the flow opening is at its maximum restriction, and thus coincides with the entrance plane of the second nozzle 6. In a similar way as for the first nozzle, there is also defined an exit plane 9 of the second nozzle 6.

5        A second nozzle 6 is connected to the mixing chamber 5 on a downstream side thereof, a smallest waist diameter  $D_2$  corresponding to a flow opening having a first cross sectional flow area of  $A_2$  in the narrowest flow restriction, and a nozzle length  $L_2$  measured between  
10       entrance plane 8 and exit plane 9. Like the first nozzle, the second nozzle 6 may have a non-circular cross section, such as an oval cross section, but in the preferred embodiment of Figure 2 the nozzle 6 is circular having a diameter  $D_2$ .

15       The second nozzle 6 is eccentrically placed relative to the first nozzle 3. The amount of eccentricity is indicated in the drawing by E. The eccentricity E in this case equals half of the difference between the two nozzle diameters ( $D_2 - D_1$ ) so that the first and second nozzle  
20       inside walls on the side opposite of the abrasive particle inlet 4 are aligned with each other.

      In operation, a pressurized carrier fluid is supplied to the nozzle unit 1 through inlet 2 from where it is jetted through the first nozzle 3 into the mixing  
25       chamber 5 to form a driving jet stream. Abrasive particles, together with an entrainment fluid, are entrained by the driving jet which includes entering through the abrasive particle inlet 4 into the mixing chamber 5. In the mixing chamber 5 a mix of the driving  
30       jet, the entrainment fluid and the abrasive particles is formed. The mix is then transported through the second nozzle 6, from where it leaves the nozzle unit 1 in the

form of an abrasive jet. The abrasive jet can be directed against an object to be excavated.

When the ratio  $A_1/A_2$  is properly chosen, the velocity of the carrier fluid through the mixing chamber creates an effective suction drawing the abrasive particles into the mixing chamber. The abrasive particles are best fed into the mixing chamber via the abrasive particle inlet 4 together with an entrained fluid or an entrained liquid.

Figure 3 shows a graphic representation of a calculation of nozzle unit efficiency based on laws of conservation of energy, using volumetric flow rates for respectively the carrier fluid through the first nozzle ( $Q_{in}$ ), the entrained total volumetric flow rate of fluid and abrasive particles flowing into the mixing chamber via the abrasive particle inlet ( $Q_{ent}$ ), and the flow rate exiting the nozzle unit,  $Q_{out}$ , which is the sum of  $Q_{in}$  and  $Q_{ent}$ . The volumetric flow rate of abrasive particles,  $Q_{abr}$ , is part of  $Q_{ent}$ . The entrained mass density is a function of the density of the carrier fluid (typically 1.2 kg/l), the density of the abrasive particles (typically 7.4 kg/l for steel shot), and the volumetric concentration of abrasives in the entrainment flow.

On the horizontal axis is plotted the ratio  $A_1/A_2$  representing ratio of the cross sectional area of the first nozzle opening and the cross sectional area of the second nozzle opening and on the vertical axis the efficiency of the nozzle unit in terms of percentage of kinetic energy transfer from the jet created by the primary nozzle to the abrasive particles.

A preferred area  $W$  is hatched into the graph. The area is bound by lines 31, 32, 33, and 34, each of which have been found to result from a certain limits or

constraints associated with generating an abrasive jet stream in down-hole conditions for drilling holes into a geological earth formation.

5 Of these lines, line 31 represents an efficiency of 10%, which sets a preferred lower limit necessary to obtain a minimum excavating rate that is desired to maintain an economically viable operation.

Line 32 represents the efficiency versus area ratio behaviour under the condition that  $Q_{ent}$  is half of  $Q_{in}$ .  
10 The drilling-fluid circulation through the well restricts  $Q_{in}$  to a limited range of values. A relative increase of  $Q_{ent}$  compared to  $Q_{in}$  corresponds to a lower area ratio for any efficiency value, but it is considered impractical for a down hole tool to supply a high flow  
15 rate through the abrasive particle inlet in the spatially restricted down hole environment. The total flow rate between the mixing chamber and the hole bottom,  $Q_{out}$ , is the sum of  $Q_{ent}$  and  $Q_{in}$ , and an increasing  $Q_{ent}$  leads to correspondingly increasing fluid and particle velocities  
20 in the annular stream. It is preferred to maintain  $Q_{out}$  not higher than 150% of  $Q_{in}$ , thus  $Q_{ent}$  should not exceed 50% of  $Q_{in}$ .

In addition to that, an increase of  $Q_{ent}$  also requires an increase of  $Q_{abr}$  in order to at least  
25 maintain the efficiency of the nozzle unit. Otherwise, energy from the jet created by the first nozzle is transferred to drilling fluid instead of abrasive particles. The more solids the drilling assembly has to supply to the nozzle unit the more complex the system  
30 becomes. It is preferred to achieve a high efficiency with an as small as possible supply of entrained abrasives,  $Q_{abr}$ .

For the same reason it has been found that  $Q_{abr}$  is best kept at 10% of  $Q_{in}$  at the most. Line 33 represents the efficiency versus area ratio behaviour under the condition that  $Q_{abr}$  is kept at a constant ratio of 10% of  $Q_{in}$ . Lines 33a to 33d show the efficiency versus  $A_1/A_2$  for  $Q_{abr} = 8, 6, 4,$  and 2% of  $Q_{in}$ , respectively.

Line 34 shows the efficiency versus area ratio behaviour under the condition that 60% of the total entrained volume (liquid and abrasive particles)  $Q_{ent}$  is consumed by the abrasive particles. The packing of particles includes voids, and, therefore, the concentration of abrasive particles in the entrained fluid is less than 100%. A typical value for the maximum concentration is 60%, which is the ratio between the typical steel shot bulk density (4.4 kg/l) and grain density (7.4 kg/l). Lines 34a to 34e correspond to the conditions that  $Q_{abr} = 50, 40, 30, 20,$  and 10% of  $Q_{ent}$ , respectively. It can be seen that the lower the percentage the lower the efficiency. This is due to the fact that a higher fraction of the energy vested in  $Q_{in}$  will be transferred to the fluid component of the entrained volume instead of the abrasive particles.

Generally, the ratio  $A_1/A_2$  of the cross sectional area of the first nozzle opening and the cross sectional area of the second nozzle opening should be in a range of 0.50 to 1.0, preferably in a range of 0.50 to 0.90 to allow for higher efficiencies. Efficiencies of 20% or more are achievable by selecting  $A_1/A_2$ , to be in a range of 0.50 to 0.80. Most preferably, the area ratio  $A_1/A_2$  is selected in a range of 0.50 to 0.60, to also maximally facilitate the second nozzle to receive a diverged jet stream.

The length of the mixing chamber best lies in a range of 0.80 to 2.0 times  $D_1$ . The length  $L_2$  of the second nozzle best lies in a range of 4 to 10 times  $D_2$ .

5 In the preferred embodiment as shown in Figure 2, the ratio  $A_1/A_2$  is 0.56 (corresponding to  $D_1/D_2 = 0.75$ ). The length  $L_1$  of the mixing chamber is 1.1 times  $D_1$ ; the length  $L_2$  of the second nozzle 6 is 7 times  $D_2$ .

10 The nozzle works best with a carrier fluid in liquid form, particularly water or a drilling mud. The pressure differential over the first nozzle 3 is typically between 100 and 700 bars. The high pressure jet diverges by approximately 8 to 9° as it leaves the first nozzle 3. With the relative dimensions of the nozzle unit 1 as given above, the high-pressure jet discharged from the first nozzle 3 into the mixing chamber 5, should  
15 completely enter into the second nozzle 6. In particular, by having the abrasive particle inlet 4 on one side of the mixing chamber 5 and the inside walls of the first and second nozzles on the opposing side in alignment with each other, it is achieved that the flow from the first  
20 nozzle 3 into the second nozzle 6 is optimized.

Figure 4 shows a schematic cross section of an excavation tool comprising a combination 10 of a nozzle unit 1, which may be the nozzle unit as shown in  
25 Figures 1 and 2, and a separation device 12 for magnetically separating abrasive particles from a fluid. Other than the nozzle unit, the separation device 12 and the excavation tool are similar to those disclosed in International publication WO 02/34653, the content of  
30 which is herewith incorporated by reference.

For this tool the abrasive particles should comprise or be made of a magnetizable material, such as steel shot. The excavating tool 6 is provided with a



- 15 -

longitudinal drilling fluid passage 11 in fluid communication with the nozzle unit 1 via inlet 2, for supplying the pressurized carrier fluid.

The separation device 12 comprises a magnetic body 13, rotatably arranged in a support sleeve 15. The magnetic body 13 generates a magnetic field for retaining the abrasive particles on the support sleeve 15. The inlet 4 for abrasive particles is located at the lower end of the support sleeve 15.

The magnetic body 13 has a central longitudinal shaft 18 and is rotatable relative to the sleeve 15 about the central longitudinal shaft 18. Drive means 19 are provided to drive shaft 18. The magnetic body 13 contains helical bands of increased magnetic field strength and helical bands of relatively low magnetic field strength. Preferably, the magnetic body 13 is formed by a stack of individual smaller magnets such as described in International application PCT/EP2004/051407 of which application priority is presently claimed and which is hereby incorporated by reference.

The second nozzle 6 is arranged above an optional foot part 14, and is inclined relative to the longitudinal direction of the excavation tool 10 at an inclination angle of 15-30° relative that direction, but other angles can be used. Preferably the inclination angle is about 21°, which is optimal for abrasively eroding the bottom of the bore hole 17 by axially rotating the complete excavation tool 10 about its longitudinal direction inside the bore hole 17.

Further details on various parts of the abrasive particle recirculation system and excavating tool can be found in International application PCT/EP2004/051407, already mentioned above.

- 16 -

In operation, the excavating tool 10 works as follows. The excavation tool 10 is connected to the lower end of the drill string (not shown) that is inserted into the borehole 17. The pressurized carrier fluid is  
5 supplied in the form of a drilling fluid that is pumped by a suitable pump (not shown), the drill string and the fluid passage 11 into the nozzle unit 1. During pumping, the drilling fluid is provided with a small amount of abrasive particles.

10 As explained above, the first nozzle 3 is arranged with a flow restriction, over which a pressure drop is present which drives the acceleration of the drilling fluid.

The drilling fluid flows through the mixing chamber 5  
15 into the second nozzle 6, and is jetted against the borehole bottom 20. Simultaneously the excavation tool is rotated about its longitudinal axis. A return stream of drilling fluid and abrasive particles flows from the borehole bottom 20 through the annulus between the  
20 borehole 17 and the excavation tool, thereby passing along the support sleeve 15.

Simultaneously with pumping of the stream of drilling fluid, the magnet 13 is rotated about its shaft 18. The magnet 13 induces a magnetic field extending to and  
25 beyond the outer surface of the support sleeve 15. As the return stream passes along the support sleeve 15, the abrasive particles in the stream are separated out from the stream by the magnetic forces from the magnet 13 which attract the abrasive particles onto the outer  
30 surface of the support sleeve 15.

The stream of drilling fluid, which is now substantially free from abrasive magnetic particles, flows further through the bore hole to the pump at

surface and is re-circulated through the drill string after removal of the drill cuttings.

The magnetic abrasive particles retained on the support surface 15 are attracted towards the helical band having the highest magnetic field. Due to rotation of the magnet 13, and the helical bands of high and low magnetic field strengths, the abrasive particles are forced to follow a helically downward movement along the support sleeve 15.

As the particles arrive at the abrasive particle inlet 4, the stream of drilling fluid flowing from the first nozzle 3 into the mixing chamber 5 again entrains the abrasive particles. Thus, the abrasive particles are again jetted against the borehole bottom 20 and subsequently flow in upward direction through the borehole 17. The cycle is then repeated continuously.

In order to enhance the downward transport of the abrasive particles along the support sleeve 15, the support sleeve 15 may be slightly tapered so that its diameter at its lower end is smaller than at its upper end. A short tapered section 21 may be provided at the lower end of magnet 13 whereby the support sleeve 15 is provided with a corresponding conical taper in a manner that the inlet 4 for abrasive particles provides fluid communication between the support surface 15 surrounding the tapered section 21 and the mixing chamber 5.

The conical taper is best based on the same angle as the above-discussed inclination angle of the second nozzle 6.

The support sleeve 15 as shown in Figure 4 is provided with a helically extending guide plates 24a and 24b protruding outwardly from the surface of the support sleeve 15. This guides the abrasive particles on their

way down along the support sleeve 15. The downward transport velocity of the abrasive particles is increased if the guide plates run vertically parallel to the longitudinal axis. Preferably, the drilling fluid passage 11 can be provided in longitudinal contact with the support sleeve 15 as the guide plate, replacing the separate guide plates 24a and 24b.

Referring again to Figure 4, a magnetic attractor body 16 is preferably provided adjacent the mixing chamber on the side of the mixing chamber opposite to the abrasive particle inlet 4. This causes magnetic field lines to run from the lower end 21 of the magnet to this magnetic body. As a result, the magnetic field from the cylindrical magnet is pulled inside the mixing chamber 5. This achieves that the magnetic abrasive particles can form chains from the lower end of the support surface 15 towards the magnetic attractor body 16, thereby crossing the jet that is discharged from the first nozzle 3. The particles in these chains thereby interact with the stream of drilling fluid passing through the mixing chamber 5, and thus the entrainment of these particles in the drilling fluid will be enhanced.

Suitable magnets can be made from any highly magnetisable material, including NdFeB, SmCo and AlNiCo-5, or a combination thereof. Preferably the magnet also has a magnetic energy content of at least  $140 \text{ kJ/m}^3$  at room temperature, preferably more than  $300 \text{ kJ/m}^3$  at room temperature such as is the case with NdFeB-based magnets.

The sleeve 15 and the drilling fluid passage 11 are best made of a non-magnetic material. Super alloys, including high-strength corrosion resistant non-magnetic Ni-Cr alloys, in particular a Ni-Cr alloy available under

the name Inconel-718, have been found to be particularly suitable.

Typical dimensions relating to the excavating tool are given in the following table.

Part name	Reference number	Size
Outer diameter of foot part	14	73 mm
Axial length of magnet	13	120 mm
Outer diameter of magnet	13	29 mm
Diameter in lower part of support surface	15	34 mm
Diameter in upper part of support surface	15	52 mm

5           The abrasive particles have a specific gravity (in  
the case of steel shot or steel grit particles: 7-8 SG),  
which is substantially higher than the typical specific  
gravity of the drilling fluid (0,8-2.3 SG). This improves  
the situation that a relatively small volumetric  
10           entrainment rate of abrasive material is sufficient for a  
substantial kinetic energy transfer.

C L A I M S

1. Nozzle unit for generating an abrasive jet, which nozzle unit comprises:
- a first nozzle connected to a pressurized carrier fluid supply, which first nozzle in a section thereof with its highest restriction defines a first nozzle opening having a cross sectional area  $A_1$ ;
  - a mixing chamber in which the first nozzle discharges;
  - a second nozzle connected to the mixing chamber, which second nozzle in a section thereof with its highest restriction defines a second nozzle opening having a cross sectional area  $A_2$ ; and
  - an abrasive particle inlet discharging in the mixing chamber;
- wherein the ratio  $A_1/A_2$  is greater than or equal to 0.50 and lower than 1.
2. Nozzle unit according to claim 1, wherein the length in flow direction of the mixing chamber is such, that taking into account the divergence of the jet to be discharged from the first nozzle, the diameter of the jet leaving the mixing chamber is smaller than the diameter of the second nozzle opening.
3. Nozzle unit according to claim 1 or 2, wherein the length in flow direction of the mixing chamber is in the range of 0.8-2.0 times the diameter of the first nozzle opening.
4. Nozzle unit according to any of the preceding claims, wherein the length in flow direction of the second nozzle is in the range of 4-10 times the second nozzle diameter.

- 20 -

C L A I M S

1. Nozzle unit for generating an abrasive jet, which nozzle unit comprises:

- a first nozzle connected to a pressurized carrier fluid supply, which first nozzle in a section thereof with its highest restriction defines a first nozzle opening having a cross sectional area  $A_1$ ;

- a mixing chamber in which the first nozzle discharges;

- a second nozzle connected to the mixing chamber, which second nozzle in a section thereof with its highest restriction defines a second nozzle opening having a cross sectional area  $A_2$ ; and

- an abrasive particle inlet discharging in the mixing chamber;

wherein the ratio  $A_1/A_2$  is greater than or equal to 0.50 and lower than 1.

2. Nozzle unit according to claim 1, wherein the length in flow direction of the mixing chamber is such, that taking into account the divergence of the jet to be discharged from the first nozzle, the diameter of the jet leaving the mixing chamber is smaller than the diameter of the second nozzle opening.

3. Nozzle unit according to claim 1 or 2, wherein the length in flow direction of the mixing chamber is in the range of 0.8-2.0 times the diameter of the first nozzle opening.

4. Nozzle unit according to any of the preceding claims, wherein the length in flow direction of the second nozzle is in the range of 4-10 times the second nozzle diameter.

5. Nozzle unit according to any of the preceding claims, wherein the second nozzle is eccentrically arranged relative to the first nozzle.

5 6. Nozzle unit according to claim 5, wherein the eccentric displacement of the second nozzle has a component in the direction of the abrasive particle inlet.

10 7. Nozzle unit according to claim 5 or 6, wherein at least part of an inside wall of the first nozzle is aligned with at least part of an inside wall of the second nozzle.

15 8. Nozzle unit according to any of the preceding claims, comprising a supply channel connected to the abrasive supply inlet, wherein the supply channel surrounds the mixing chamber by an angle of less than  $180^\circ$ .

20 9. Nozzle unit according to any of the preceding claims, comprising a supply channel connected to the abrasive supply inlet, wherein the included angle between the flow direction in the supply channel and an axis along the flow direction of the primary nozzle, is smaller than  $60^\circ$ .

25 10. Combination of a nozzle unit according to any of the preceding claims and a separation device for separating magnetical or magnetizable abrasive particles from a fluid, which separation device comprises a magnet body for attracting the abrasive particles out of a fluid flowing along the separation device, and a support surface at least partially enveloping the magnet body, and means for transporting attracted abrasive particles  
30 along the support surface to the abrasive particle inlet of the nozzle unit.

11. Method of excavating a hole into an object, comprising the steps of:



- 22 -

- arranging an abrasive jet excavating tool comprising a nozzle unit according to any of the claims 1-9 into the hole;
- generating an abrasive jet by supplying a pressurized carrier fluid to the first nozzle and discharging  
5 abrasive particles into the mixing chamber; and
- directing the abrasive jet into the object.

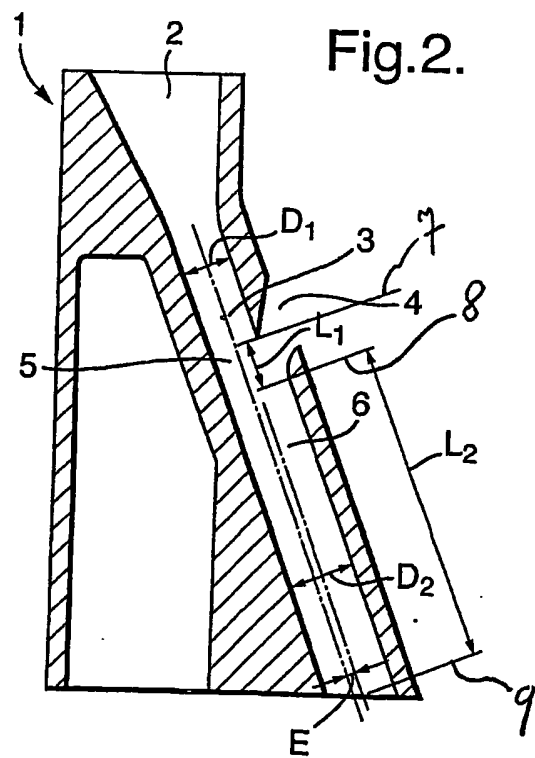
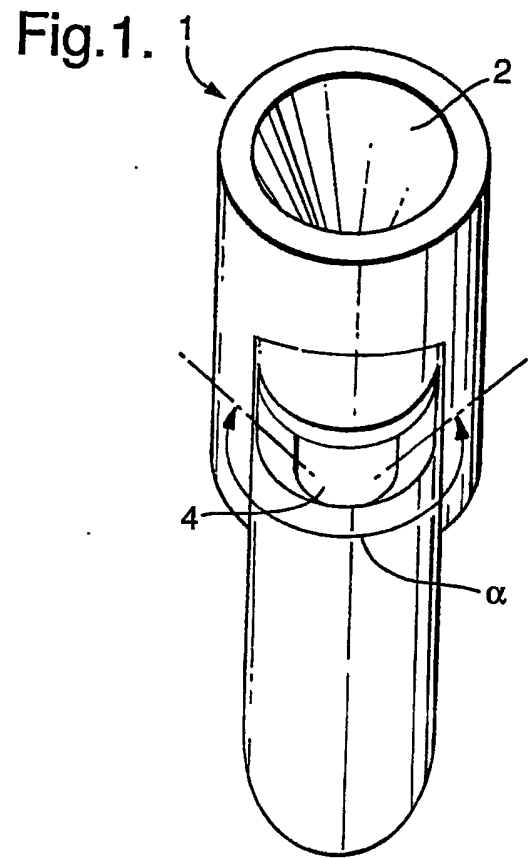


Fig. 3


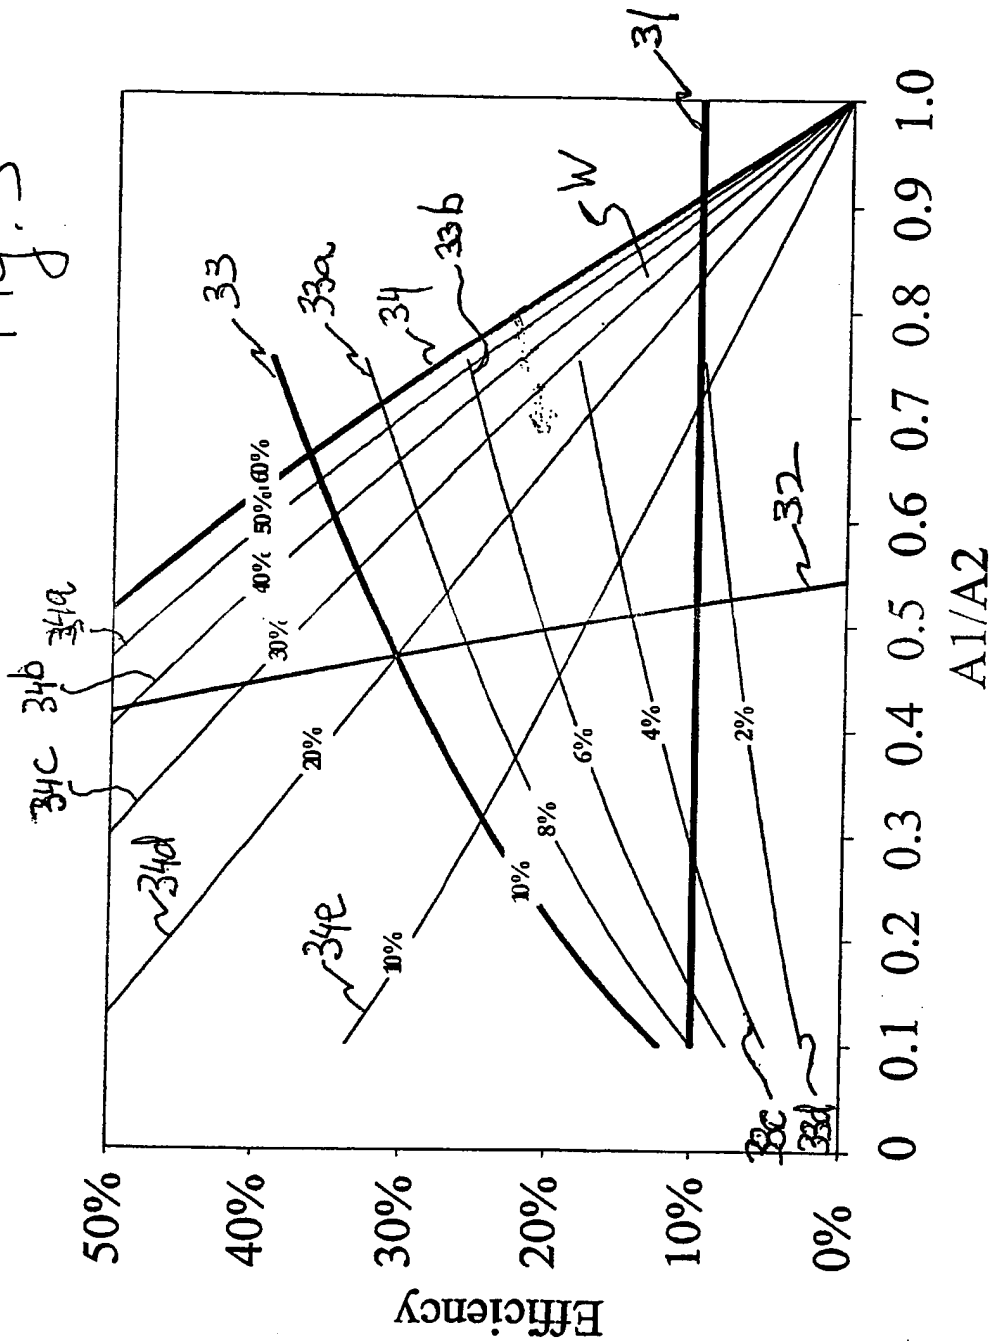


Fig. 4.

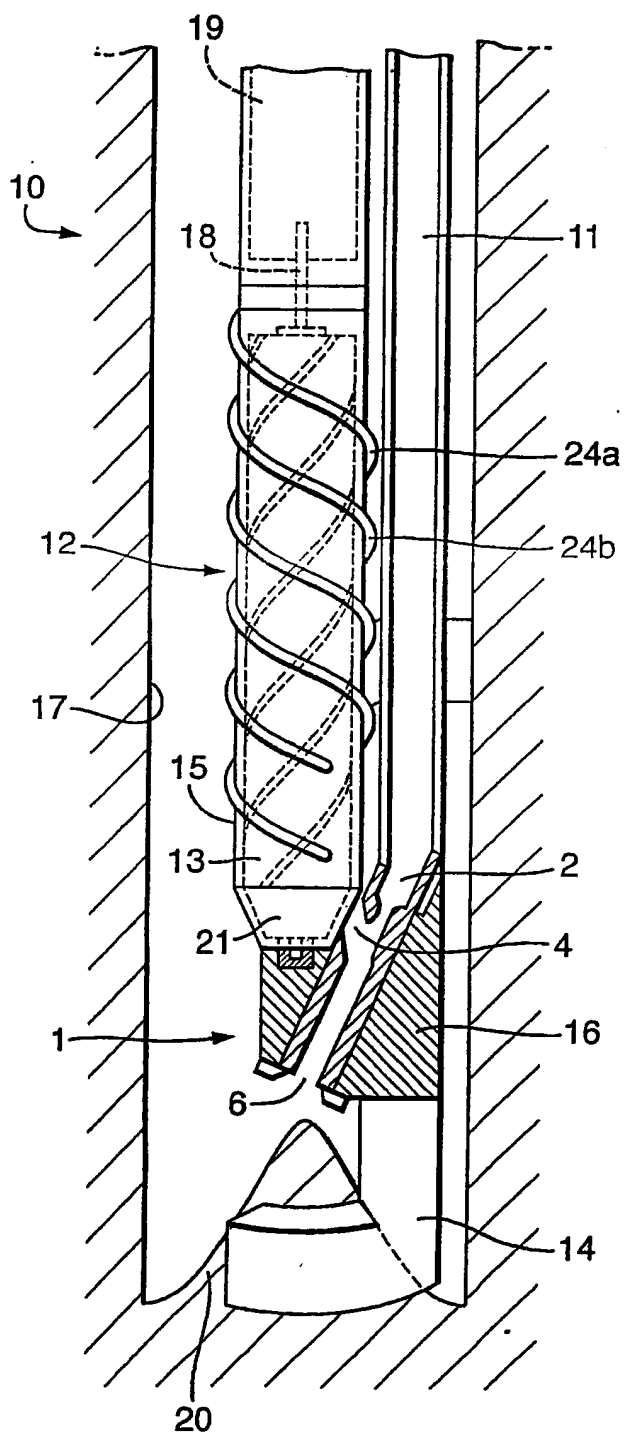

# INTERNATIONAL SEARCH REPORT

PCT/EP2004/052593

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B7/18 E21B10/60 B24C1/04 B24C5/04 E21B41/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B B24C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 119 338 A (JETIN IND LTD) 26 September 1984 (1984-09-26) page 7, lines 21-23 figure 1	1,8
Y		2,11
X	US 4 555 872 A (YIE GENE G) 3 December 1985 (1985-12-03) column 17, lines 20-23 column 17, lines 37-39 column 17, lines 50-54 figure 1	1-4,8,9
Y		2
Y	WO 00/66872 A (SHELL CANADA LTD ;SHELL INT RESEARCH (NL)) 9 November 2000 (2000-11-09) the whole document	11
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

- \*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the International search

14 January 2005

Date of mailing of the International search report

25/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schouten, A

## INTERNATIONAL SEARCH REPORT

PCT/EP2004/052593

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 526 087 A (DALE BRIAN DAVID) 3 February 1993 (1993-02-03) claim 1 figure 1	1,8
A	US 6 283 833 B1 (COOGAN ROSS T ET AL) 4 September 2001 (2001-09-04) column 11, lines 54-61 table 1 figure 1	1,11
A	WO 02/34653 A (SHELL CANADA LTD ;SHELL INT RESEARCH (NL)) 2 May 2002 (2002-05-02) cited in the application figure 4	1,11
A	US 2 779 571 A (ORTLOFF JOHN E) 29 January 1957 (1957-01-29) column 1, lines 32-34 figure 1	1,11
A	WO 02/092956 A (SHELL CANADA LTD ;BLANGE JAN JETTE (NL); SHELL INT RESEARCH (NL)) 21 November 2002 (2002-11-21) the whole document	1,11

## INTERNATIONAL SEARCH REPORT

PCT/EP2004/052593

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0119338	A	26-09-1984	EP 0119338 A1	26-09-1984
US 4555872	A	03-12-1985	US 4478368 A	23-10-1984
WO 0066872	A	09-11-2000	AU 762490 B2	26-06-2003
			AU 4564300 A	17-11-2000
			BR 0010111 A	19-02-2002
			CA 2384305 A1	09-11-2000
			CN 1349585 T	15-05-2002
			EA 2542 B1	27-06-2002
			EG 22653 A	31-05-2003
			WO 0066872 A1	09-11-2000
			EP 1175546 A1	30-01-2002
			NO 20015170 A	23-10-2001
			US 6510907 B1	28-01-2003
EP 0526087	A	03-02-1993	GB 2258416 A	10-02-1993
			EP 0526087 A1	03-02-1993
			US 5335459 A	09-08-1994
US 6283833	B1	04-09-2001	US 6168503 B1	02-01-2001
			AU 747679 B2	16-05-2002
			AU 8480998 A	08-02-1999
			BG 63592 B1	28-06-2002
			BG 104067 A	31-07-2000
			BR 9811100 A	15-01-2002
			CA 2295855 A1	21-01-1999
			CN 1263487 T	16-08-2000
			DE 69809053 D1	05-12-2002
			DE 69809053 T2	18-06-2003
			DK 994764 T3	03-03-2003
			EA 3436 B1	24-04-2003
			EE 200000006 A	15-08-2000
			EP 0994764 A1	26-04-2000
			ES 2186188 T3	01-05-2003
			ID 24251 A	13-07-2000
			IL 133718 A	04-01-2004
			JP 2001509434 T	24-07-2001
			NO 20000110 A	13-03-2000
			NZ 502746 A	28-06-2002
			OA 11309 A	24-10-2003
			PL 338000 A1	25-09-2000
			PT 994764 T	31-03-2003
			SI 994764 T1	30-04-2003
			TR 200000526 T2	21-07-2000
			WO 9902307 A1	21-01-1999
			EG 21601 A	31-12-2001
			TW 403691 B	01-09-2000
			ZA 9806135 A	28-01-1999
WO 0234653	A	02-05-2002	AU 2179102 A	06-05-2002
			BR 0114894 A	12-08-2003
			CA 2427090 A1	02-05-2002
			CN 1471489 T	28-01-2004
			EA 4028 B1	25-12-2003
			EG 22760 A	30-07-2003
			WO 0234653 A1	02-05-2002
			EP 1328458 A1	23-07-2003

# INTERNATIONAL SEARCH REPORT

PCT/EP2004/052593

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0234653	A	NO 20031863 A US 2002079998 A1	25-04-2003 27-06-2002
US 2779571	A	29-01-1957	NONE
WO 02092956	A	21-11-2002	BR 0207892 A 23-03-2004 CA 2439912 A1 21-11-2002 EA 4567 B1 24-06-2004 EG 23135 A 28-04-2004 WO 02092956 A1 21-11-2002 EP 1366268 A1 03-12-2003 MX PA03007979 A 04-12-2003 US 2004094332 A1 20-05-2004